



F R I E D R I C H

1 8 8 3



# PORTABLE AIR CONDITIONERS

## Features

- 3-IN-1 SYSTEM: Air conditioner, dehumidifier and fan
- Dual hoses for closed loop cooling and exhaust functions for up to 40% faster, more effective cooling
- Self evaporative condensate system means no bucket to empty
- Condensate overflow protection- if tank should become full, the unit will automatically shut off and unit can be drained through the water outlet drain
- 24 hour timer
- 3 fan speeds
- Plugs into standard 115 volt outlet
- Washable, antimicrobial air filter
- Auto restart after power outage
- Window kit fits both vertical and horizontal window openings
- All installation accessories included



TOP MOUNTED DIGITAL CONTROLS


DUAL HOSE DESIGN FOR UP TO 40% FASTER COOLING

# PORTABLE AIR CONDITIONERS

Dual hose design provides up to 40% faster cooling and greater energy efficiency than single hose models.




## DUAL HOSE DESIGN

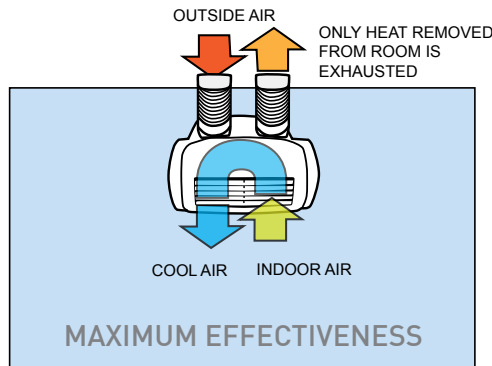

Only indoor air is conditioned and returned into the room. Indoor air is not rejected (wasted) and vented outside. The room is cooled up to 40% faster with greater energy efficiency.

## SINGLE HOSE DESIGN

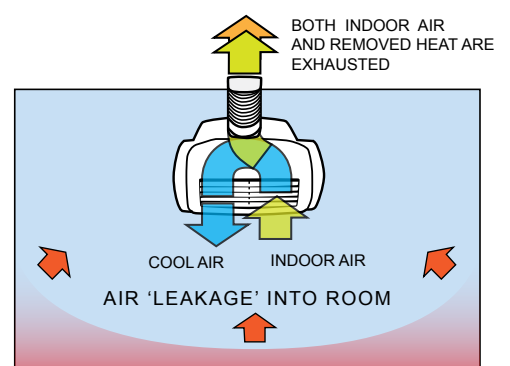

Single hose design relies on air 'leakage' from doors and windows to make up for air volume lost as indoor air is exhausted outside. The room takes longer to cool using more energy.

## Ideal for these applications

- Workshops and garages
- Home offices
- Dorm rooms
- Bedrooms, attics and basements
- Sunrooms/ enclosed patios
- Supplemental or emergency cooling anywhere

## Specifications



| Model                    |         | P09B   | P12B  |
|--------------------------|---------|--------|-------|
| <b>PERFORMANCE</b>       |         |        |       |
| Cooling Capacity         | Btu     | 9300   | 11600 |
| Energy Efficiency Rating | EER     | 9.4    | 8.8   |
| Air Movement             | CFM     | 212    | 235   |
| Moisture Removal         | Pts/hr. | 5.0    | 6.0   |
| <b>SPECIFICATIONS</b>    |         |        |       |
| Rated Current            | Amps    | 10.8   | 11.5  |
| Refrigerant Type         |         | R410A  |       |
| Power Supply             | Volts   | 115    |       |
| Dimensions- Inches       | W       | 19 1/4 |       |
|                          | H       | 33 1/2 |       |
|                          | D       | 15 1/2 |       |
| Net Weight               | Lbs.    | 89     | 90    |

| Model      | Circuit Rating Breaker or T-D Fuse | Plug Face (NEMA#) | Wall Outlet Appearance | Power cord length |
|------------|------------------------------------|-------------------|------------------------|-------------------|
| P09B, P12B | 125V - 15A                         | 5 - 15P           |                        | 6 ft.             |

## Portable Accessories

**DUAL INTAKE/ EXHAUST HOSES (Included)**  
Flexible, heavy duty intake/ exhaust hoses extend from 2' to 5'. The hoses can be vented through a window or through a wall opening to the outside.

**WINDOW SLIDER KIT (Included)**



Fits HORIZONTAL or VERTICAL WINDOWS  
WINDOW OPENING:  
Minimum: 26"\* Maximum: 46"

\* Window slider kit can be trimmed to fit a smaller opening.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



**FRIEDRICH**

Friedrich Air Conditioning Co. | 10001 Reunion Place, Suite 500 | San Antonio, TX 78216 | 800.541.6645 | fax 210.357.4480  
www.friedrich.com

